

# INDOOR ETHYLENE OXIDE MONITOR

Model GM-600



3 color LED Digital Display



## Features

- Designed for easy installation & operation*
- Indicator can be set anyone's eye level*
- Intuitive three color alarming display*
- Two kinds of power supply are available, 100VAC and 24VDC*
- Remote sensor with cable length 3m available*


## Application

- Concentration monitoring for gas leakage from sterilization equipment*


## Specifications

Detection Principle	Semiconductor method
Gas Detected	Ethylene Oxide
Display	LCD digital display (7 segment / Green·Orange·Red backlight)
Sampling Method	Remote measuring method
Preset Alarm Level	1st : 10ppm / 2nd : 50ppm
Alarm delay time	20 sec. (Buzzer only)
Alarm type	2 preset alarms (H-HH)
Alarm display	1st : Orange backlight / 2nd : Red backlight · Buzzer
Alarm method	Auto-reset or Latching
Alarm pattern	System error / Sensor error
Trouble display	Trouble information, Orange backlight, Buzzer
Trouble method	Auto-reset
Remote cable	3m
Power Supply	AC100V±10% 50/60Hz or DC24V±10%
Power Consumption	AC : MAX6VA DC : MAX4W
Operating temp. & humidity	-10~+40°C (No sudden change) 、 Below 20~85%RH (Non-condensing)
Dimension	Body : Approx. 80(W)×120(H)×35.5(D)mm Remote sensor : Approx. 40(W)×96(H)×35.5(D)mm
Weight	Body : AC spec. approx. 200g / DC spec. approx. 180g Remote sensor : Approx. 55g (w/o cable)

## Dimension

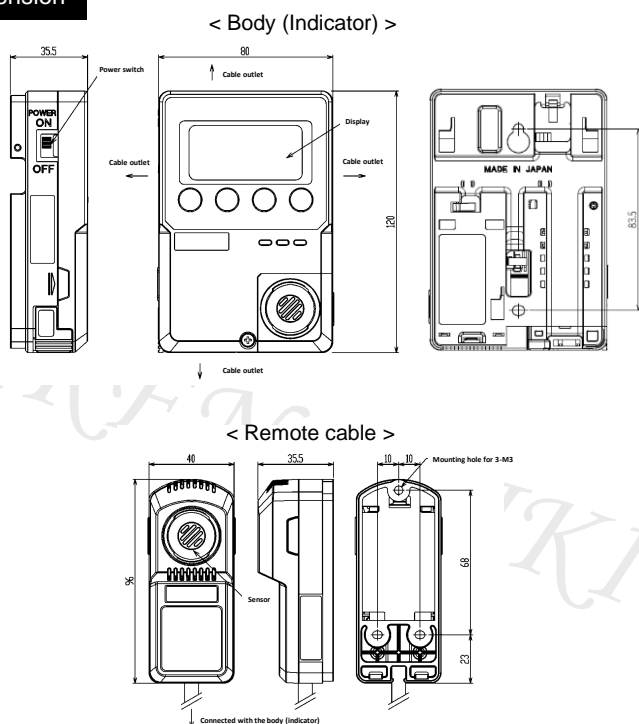

## Image

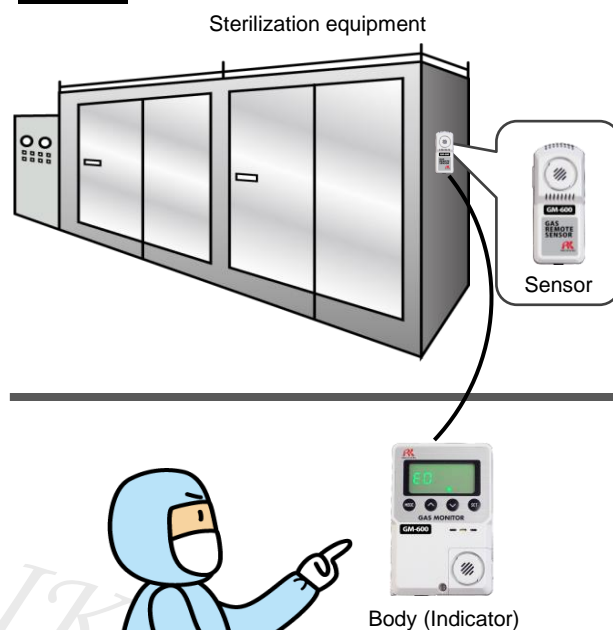

  
**RIKEN KEIKI Co., Ltd.**

2-7-6 Azusawa, Itabashi-ku, Tokyo, 174-8744, Japan

Phone : +81-3-3966-1113

Fax : +81-3-3558-9110

E-mail : [intdept@rikenkeiki.co.jp](mailto:intdept@rikenkeiki.co.jp)

Web site : <http://www.rikenkeiki.co.jp/english/>